

DUCHESNE COUNTY MONUMENT SURVEY RECORD



T1S R3W

SEC 29 | SEC 28

SEC 32 | SEC 33

U.S.B.&M.

E-9

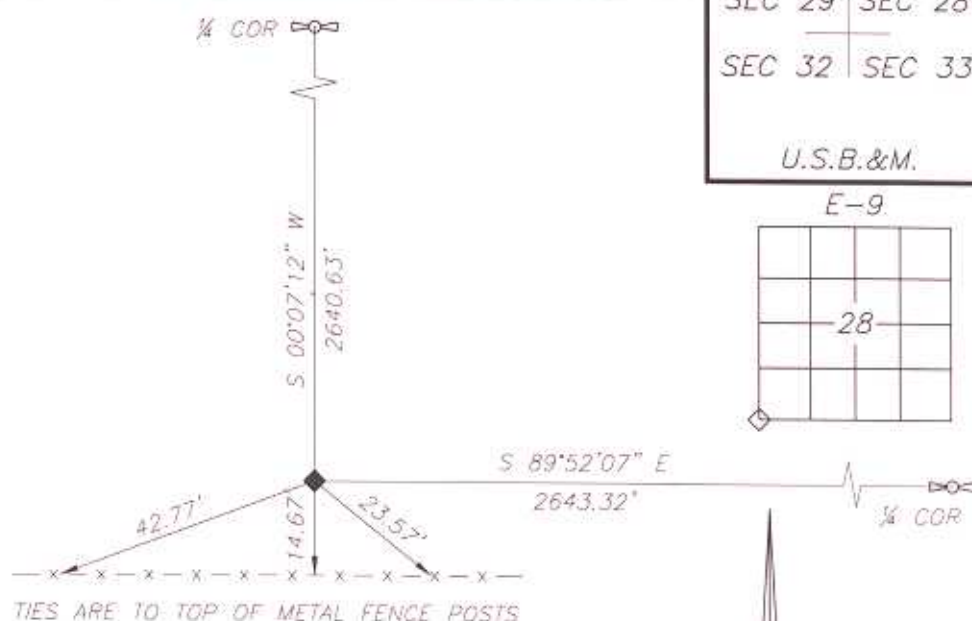

NORTH

SCALE: 1"=30'



NOTE:

THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (1/4 CORNER) LOCATED AT LAT. 40°23'18.204"N AND LONG. 110°10'15.865"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND BRASS CAP ON IRON PIPE SET ON PREVIOUS SURVEY FROM TIES AT POSITION OF MARKED STONE

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

TIED MONUMENT INTO VRS CONTROL NETWORK

STATE PLANE COORDINATE DATA (U.S. SURVEY FEET)

UTAH CENTRAL ZONE

N:7302122.312
E:1992267.952

LATITUDE: 40°21'33.813" N

LONGITUDE: 110°14'14.492" W


PUBLIC LAND SURVEY SYSTEM GCDB ID NO. 300200

CERTIFICATION

I, Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same.

Date 28 Aug '09

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

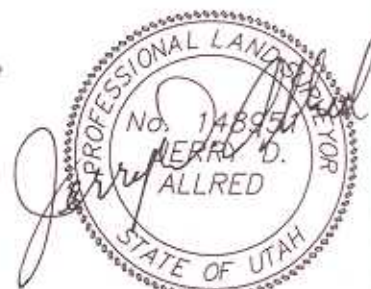

SCANNED